
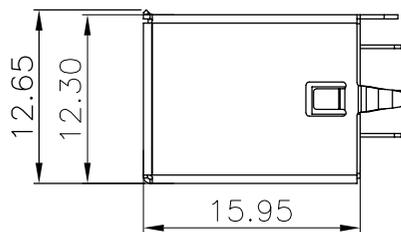

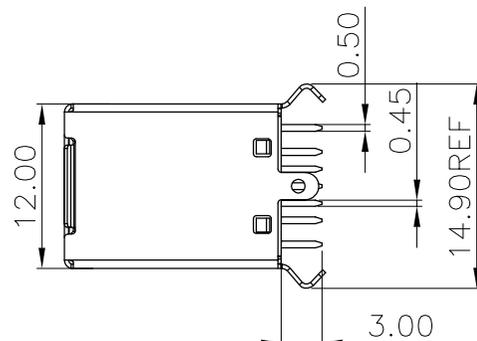


SPECIFICATIONS:
 Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC 100V(RMS)
 Insulation resistance:100Megohms Minimum.
 Contact Resistance:
 30mΩ Max for pin1&pin4
 50mΩMax for other contacts
Mechanical Characteristics:
 Mating Force: 35 Newtoms.Maximum
 Unmating Force:10 Newtoms.Minimum.
 8N Min After Durability
MATERIAL:
 Housing: PA9T+30%GF 94V-0 COLOR:BLUE
 Contact: copper alloy(T=0.25mm)
 Shell: Brass
PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated
 Operating Temperature: -55*to+85*

PART NO

317 A H 09 F X I SH N 1 A X
 1 2 3 4 5 6 7 8 9 10 11 12

- 1.SERIES NO. 317=USB Series 3.0
- 2.TYPE: A=Standard(Dip)
- 3.GREEN OPTION: H=RoHS(Matte)(Halogen Free)
- 4.CONTACT NUMBER: 09=9Pins
- 5.CONTACT TYPE: F=Female
- 6.CONTACT AREA PLATING: S=Gold Flash
- 7.SOLDER AREA PLATING: T=TIN
- 8.TYPE: SH=B 180°
- 9.SHELL TYPE: N=Nickel Plated
- 10.POSITION OPTION. 1=6.00mm
- 11.PACKING A=Tray
- 12.INSULATOR COLOR: 2=Blue 3=Black

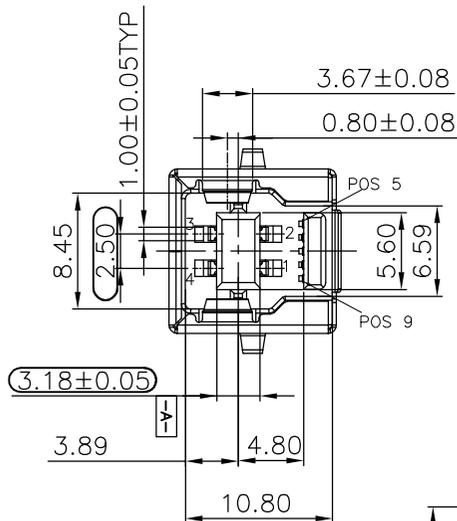

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	StdB_SSTX-
2	D-	6	StdB_SSTX+
3	D+	7	GND_DRAIN
4	GND	8	StdB_SSRX-
Shell	Shield	9	StdB_SSRX+

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG. ±2°
 X. ±0.35
 .X ±0.25
 .XX ±0.25




CHANT SINCERE CO., LTD
 TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN	UNIT: mm
DRAWN PEARL	04/20/2016
CHECKED	/ /
APPROVED	/ /
SIZE A4	REV. X3


DRAWN NAME: USB 3.0 BF 180° DIP 1/2
PRODUCT NO. 317AH09FXTSHN1AX
FILE NAME: 317AH09FXTSHN1A2(X02)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

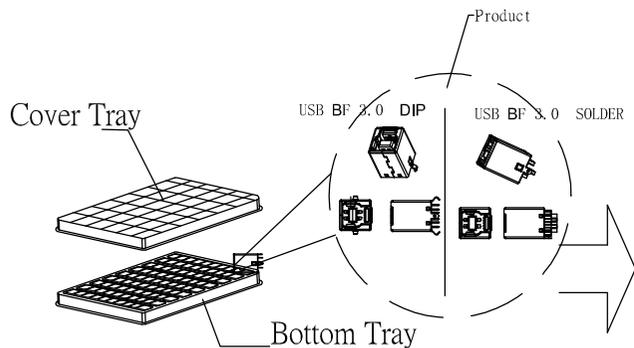

② 100Pcs/tray, 四周并用订书机装订。Stapled each side


每5盘上下加隔板用PE膜成十字形捆紧
Stacking 5 trays and packaging with the top and bottom corrugated paper board, then tying with PE tapes.



贴上"QC"检验标签
Stick QC Label.




③ 紙板規格:220*255 A=A
Corrugated paper board:220*255 A=A

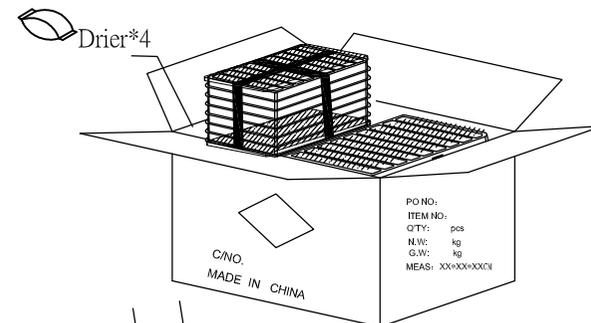


5tray/stack, 6stack/carton
(3 stack/row),3K/carton.


① PETARY (1Set).

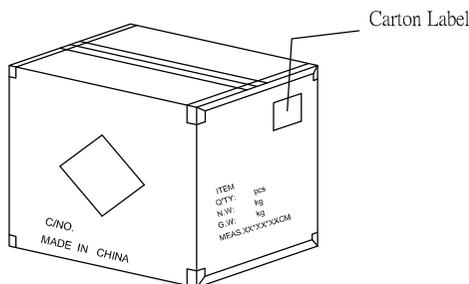

⑥ 依图示粘贴产品或其它标签。
As the indication sticking the label at the certain place of carton.



⑤ 外箱用透明胶纸带封"工"字型。
Stuck by adhesive tape in H shape.

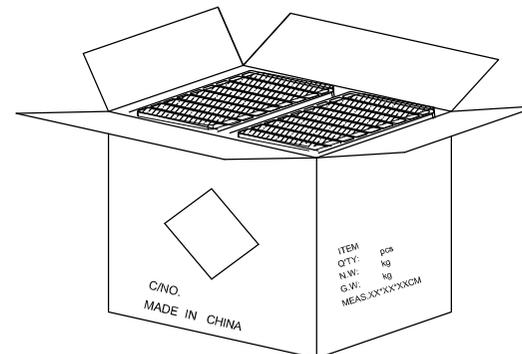

④ 每箱平放15盒*2, 若尾数箱在空间处加装填充物。
15tray/row *2, Dispose fillers for fixed those package, if there is still space.
Carton Size: 47*32.3*33CM

备注:

- 每盘装成品100pcs, 四周并用订书机装订;
每5盘为一捆, 上下加隔板, 并用PE胶膜将每捆紧捆;
Put each products into the tray, 100Pcs/Tray, Stapled each side. Tied every 5 tray in a block transparent tape.
- 每箱装30盒(3); 並放乾燥劑
30tray(3K)/Carton, With drier then put into the carton.
- 外箱用透明胶纸带封"工"字型; 依外箱图示位置粘贴好产品或其它标签
(若客户另有贴标签要求, 则按其定单注明之要求贴)
Stuck by adhesive tape in H shape.
As the indication sticking the label at the certain place of carton.

NAME	QTY	N.W.	G.W.
USB BF 3.0 180 DIP	3K set/Carton	10.45KG	13.7KG
USB BF 3.0 180 SOLDER	3K set/carton	10.2KG	13.4KG

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO., LTD TEL:886-02-86471251 FAX:886-02-86472962
ANG.	±2°	
X.	±0.35	
.XX	±0.25	
SCALE: AS SHOWN	UNIT: mm	
DRAWN PEARL	04/20/2016	DRAWN NAME:
CHECKED	/ /	USB 3.0 BF 180° DIP
APPROVED	/ /	PRODUCT NO. 317AH09FXTSHN1AX
REV. X3	SIZE A4	FILE NAME: 317AH09FXTSHN1A2(X02)

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			A4	X3	317AH09FXTSHN1A2(X02)