

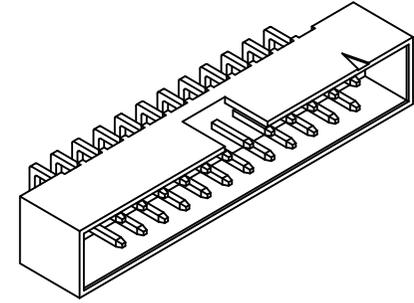





RoHS compliant

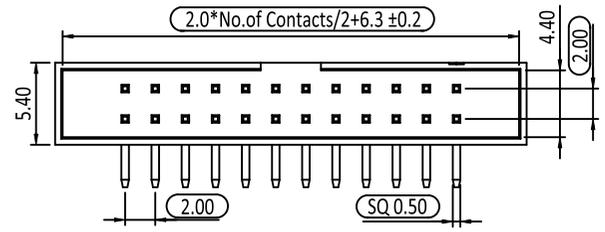

Current Rating and Voltage: 2 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Standard: Brass
 Insulator Material: High Temperature Plastic,UL 94V-0
 Finish: Standard: Gold Flash all over

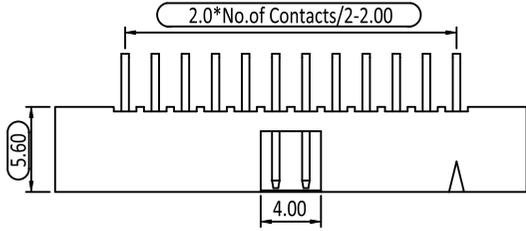

06~20 pin : 0.20 mm MAX.
 22~50 pin : 0.30 mm MAX.
 52~68 pin : 0.40 mm MAX.

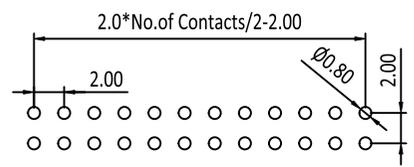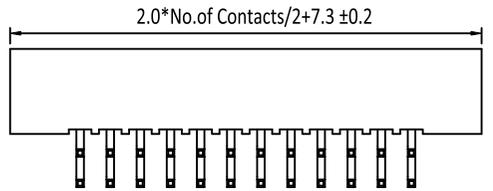

Recommended P.C. Board Hole Layout

XXX=PIN NO.					
5142101XXX0	608AEXXPGCAA3	PA6T, BLACK	BRASS, GOLD FALSH	TRAY	
NEW P/N.	OLD P/N.	CONTACT	INSULATOR	PACKING	
UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP	 CHANT SINCERE CO., LTD TEL:+886-2-8647-1251 WWW.COXOC.COM.TW		
ANG.	±5°	ST			CmK
0.	±0.5				Cpk
.0	±0.3	SCALE: AS SHOWN		UNIT: mm	
.00	±0.2	DRAWN: KEVIN_ZHENG		02 06 2023	
TITLE:		CHECKED: PEARL_HUNG		12 06 2023	
PART NO.		APPROVED: PEARL_HUNG		12 06 2023	
CODE: C6		REV. D		CUSTOMER:	

ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
	D	ECN-2305085(JOAN) CHANGE OUTLINE	31MAY2023
	C	ECN-1010011(SYLVIA) CHANGE OUTLINE	10JUN2010